

da Silva, Marcus

Trigger-Capture-Analyze: Three Steps Toward Understanding Today's Complex RF Signals," No. 3, p. 22.

Goyal, Pankaj

for Measuring Phase Noise Better Than ~165 dBc/Hz: Part I," No. 10, p. 62.

Goyal, Pankaj

Theory and Practical Considerations for Measuring Phase Noise Better Than -165 dBe/Hz: Part II." No. 11, p. 70.

Mukherjee, Somnath

"Passive Sensors Using RF Backscatter," No. 11, p. 96.

EDITORIAL INDEX 2004 • Volume 47

Polivka, Jiri

Noise Can Be Good, Too," No. 3, p. 66.

Rodenbeck, Christopher T. and Kai Chang

Automated Pattern Measurement for Circularlyolarized Antennas Using the Phase-amplitude Method," No. 7, p. 68,

Tsironis, C. and N. Misljenovic

"Pitfalls to Avoid When Using Load-pull Contours for PA Design," No. 3, p. 106.

Zhang, Pengfei

"Nonlinearity Test for a Fully Integrated Direct-conversion Receiver," No. 10, p. 94.

■ PRODUCT FEATURES

Advantest America Measuring Solutions Inc.

"An RF Component Analyzer for Measuring Multi-function RF Modules," No. 2, p. 154.

Aeroflex-KDI Integrated Products

Attenuation Solution for TDMA-to-GSM BTS Upgrades," No. 8, p. 130.

Agilent EEsof EDA

New Physical Connectivity Engine for Native High Frequency Interconnect Verifications, No. 8, p. 118.

Analog Devices

A Fast Responding 60 dB Log Amplifier for Microwave Applications," No. 4, p. 150.

A Coupled Thermal and Stress Analysis Tool for Electromagnetic Applications," No. 7, p. 112.

Applied Wave Research Inc.

'A Design Suite Built for Speed," No. 9, p. 198.

New Synthesis and Simulation Software to Enhance the Design Process," No. 6, p. 122.

Bantam Instruments

"Handheld Spectrum Analyzer for the 2.4 and 5 GHz WLAN Bands," No. 11, p. 150.

"An IEEE 802.15.4 Compliant and ZigBee-ready 2.4 GHz RF Transceiver," No. 6, p. 130.

Dielectric Laboratories Inc.

"A Ceramic Resonator Technology for 200 to 500 Percent Q Improvement," No. 10, p. 146.

Farran Technology Ltd.
"Miniature W-band Low Noise Amplifiers," No. 6, p. 136.

Terra Communications

A 10 MHz to 22 GHz MMIC Amplifier with 1 W Output," No. 9, p. 208.

LNX Corp.

A Mixed-signal ASIC for Digital RF Memory Applications," No. 12, p. 146.

M/A-COM Inc.

A Surface-mount Plastic-packaged 1 to 18 GHz Low Noise Driver Amplifier," No. 9, p. 212.

High Performance Wideband Amplifiers for Radar and Satcom Applications," No. 1, p. 142.

Magfusion Inc.

A Magnetic MEMS-based RF Relay," No. 1,

MegaPhase LLC

65 GHz VNA Test Port Extension Cables," No. 3, p. 144.

Milmega Ltd.

"An Interface Providing Web-based Control of Microwave Power Amplifiers," No. 4, p. 136.

Theory and Practical Considerations


PULSE GENERATORS



Picosecond designs and manufactures the world's leading Step, Pulse, and Impulse Generators.

Each pulse generator is designed to deliver the best time domain performance possible.

- Step, Impulse, or Monocycle Outputs
- Amplitudes up to 50 V
- Risetimes as low as 5 ps
- Programmable models with adjustable parameters
- Ideal for UWB system testing, Semiconductor testing, and Risetime characterization



2 V/div and 100 ps/div Model 10,060A with Adjustable Duration

Explore Our Product Line

PSPL has an extensive product line specialized in the generation, measurement, shaping, and transmission of broadband signals. Our product line includes instruments, modules, and components.

Amplifiers Bias tees Low-pass filters DC blocks

Comb generators TDR/T instruments Sampler modules Power dividers

Pulse Labs

cosecon

2500 55th Street, Boulder, CO 80301 Tel: (303) 209 8100 • Fax: (303) 447 2236



www.picosecond.com/gen

[Continued on page 122]



Nearfield Systems Inc.

A Powerful Alternative for High Speed Near-field or Far-field Antenna Measurements," No. 1, p. 132.

NEC Electronics (Europe) GmbH

A Low Noise Amplifier IC for 400 MHz to 2 GHz Applications," No. 4, p. 144.

NEC Electronics (Europe) GmbH

Companion Products

Indirect Synthesizers

Frequency-Locked

Oscillators (FLOs)

Digitally Tuned

Oscillators (DTOs)

Voltage-Controlled

Oscillators (VCOs)

Applications

"Frescalers that Simplify X- and Ku-band Synibesizer Architectures," No. 11, p. 164.

Paratek Microwave Inc.

Thin Film Electronically Tunable Pre-selectors for Software Defined Radios," No. 10, p. 138,

Racal Instruments Wireless Solutions

Base Station Test Set," No. 12, p. 130,

Leadless, Multi-band, High Performance GaAs HBT Driver Amplifiers for Cellular Base Station Infrastructure," No. 4, p. 160,

EDITORIAL INDEX 2004 • Volume 47

Rogers Corp.

High Frequency Circuit Materials to Meet the Needs of Today's Complex Military and High Reliability Designs," No. 7, p. 120.

Rohde & Schwarz GmbH & Co. KG

A One-box Solution for Spectrum and Vector Signal Analysis," No. 3, p. 136,

Sophia Wireless Inc.

Ka-band Solid-state Amplifiers at TWTA Power Levels," No. 2, p. 162.

Spectrum Microwave

"A MEMS-based Amplified Switch Filter Bank," No. 12, p. 136,

Thermally Stable PCB Material," No. 1, p. 146.

Tampa Microwave

Satellite On a Stick' for Path Link Simulation," No. 8, p. 124.

Thunderline-Z

"Multipin Headers with Integrated Filtering," No. 3, p. 148.

Trilithic Inc.

Remotely-tunable Notch and Bandpass Filters for Evaluating System Performance," No. 11, p. 156.

UltraSource Inc.

"Multi-laver Thin Film Interconnects." No. 12, p. 148.

Vector Fields Inc.

"Design Software for Virtual Prototyping of RF and Microwave Devices," No. 10, p. 130.

W.L. Gore & Associates

Low Cost, High Performance Prepregs for PCB Cavity Designs," No. 7, p. 128.

SPECIAL REPORTS

Fiszer, Michał and Jerzy Gruszczynski

'Got You Covered," No. 1, p. 92.

Huynh, Minh-Chau and Warren Stutzman

A Review of Radiation Effects on Human Operators of Hand-held Radios," No. 6, p. 22.

EuMW 2003 - Celebrating Endeavour in Munich," No. 1, p. 108.

Mumford, Richard

"Microwaves in Europe: Current Trends and Future Prospects," No. 9, p. 82.

SYSTEMS

Cai, Kerry Z. and Pengfei Zhang

The Effects of IP2 Impairment on an 802.11a OFDM Direct Conversion Radio System," No. 2,

Djebouri, D., A. Djebbari and M. Djebbouri

Averaging Correlation for Fast GPS Satellite Signal Acquisition in Multipath Rayleigh Fading Channels," No. 8, p. 66.

TUTORIAL SERIES


lain, P.K.


Remote Sensing Through Satellites: A Tutorial Review," No. 12, p. 22.

The Versatile Butler Matrix," No. 11, p. 126.

Robbins, Patrick Using Noise for RF Receiver Built-in Test

Applications," No. 2, p. 138,






\$6218 Fast Indirect Synthesizer performs fast and reliably over a 2 to 18 GHz range in airborne applications. As a synthesizer, the S6218 combine high precision with

a 25-us settling time. As a digitally tuned oscillator, it offers high-speed 1-us operation.

- 2-slot VME form factor
- 1-MHz step size
- Accuracy: per crystal reference

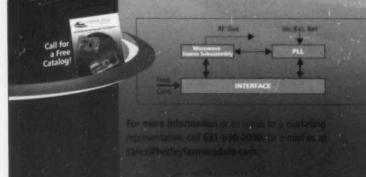



Tupta, Mary Ann

Increasing RF Device Test Throughput with Better Instrument Coordination No. 3, p. 110.

2004 EUMC CONFERENCE

European Microwave Exhibition 2004 No. 9, p. 52.

Mumford Richard

"Attending European Microwave Week," No. 9, p. 28.

Philips Semiconductors

'Amsterdam: A Clever Blend of Old and New." No. 9, p. 38.

van Genderen, Piet and Charles Ayotte

Welcome to European Microwave Week," No. 9,

EDITORIAL INDEX 2004 · Volume 47

■ 2004 MTT-S CONFERENCE

"IMS 2004 in Cowboy Country," No. 8, p. 101.

Fort Worth Convention Center Floor Plan No. 5, p. 72.

Howe, Harlan, Jr.

'Attending the Conference." No. 5, p. 36.

Teinert, Julie "Surprising Fort Worth: Culture in Cowtown, No. 5, p. 48.

Varian, Karl

Welcome to the 2004 International Microwave

Symposium," No. 5, p. 28.

2004 IEEE MTT-S IMS Technical Program No. 5, p. 76

2004 IMS Exhibitors

No. 5, p. 64.

M SUPPLEMENT FEATURES

Amphenol RF

SMP and SMPM Subminiature and Microminiature Connectors for Applications to 65 GHz," No. 3, p. 32.

CAD, Test and Measurement Directory No. 11, p. 6.

Clark, Jr., Colonel John S. and Chris Gilbert Joint EW Reprogramming Maintains a Combat

Edge," No. 8, p. 24.

CST GmbH

Complete 3D Electromagnetic Field Simulation," No. 11, p. 22.

Howe, Jr., Harlan

2004 Connector, Cable and Cable Assembly Survey," No. 3, p. 6.

Howe, Jr., Harlan, Richard Mumford

and Michael Puttré

"Military Markets - Thoughts and Projections," No. 8, p. 8.

Huber + Suhner

"An RF Cable Test Assembly," No. 3, p. 14.

M/A-COM SIGINT Products

SMR-4820 Compact Microwave Search Receiver," No. 8, p. 48.

Maury Microwave Corp.
and NMDG Engineering byba

A Network Analyzer for Complete Active Component Characterization and Real-time Harmonic Load Pull," No. 11, p. 18.

Puttré, Michael

France's Unique Horizon," No. 8, p. 34.

San-tron Inc.

New Adapter Family to Connect Reverse Polarity TNC Connectors to Type N Connectors," No. 3, p. 36.

Spectrum Elektrotechnik GmbH

New Generation Right Angle Connectors and Adapters," No. 3, p. 24.

Times Microwave Systems
"Zero dB™ Coaxial Cable Assemblies for High Performance Aircraft," No. 8, p. 50.

Troychak, Joe

Early Verification of Emerging UWB and WMAN Radio Systems, No. 11, p. 14.

The Leading Edge in Performance. **ULTRA BROADBAND** I & Q Vector Modulator or Digital Phase Shifter · 9:1 Bandwidth 2-18 GHz Simultaneous Phase & Amplitude Control Linear Control Slope Size: 3.5" x 4.25" x 0.71 · Flatness vs Frequency ±20°/3 dB Resolution < 0.1°/ 0.06 dB S21 PHASE Send For Our **New Catalog** CHa Phase States For 0, 90°, 180° and 270° @ 0 dB Amplitude 2 Emery Avenue Randolph, NJ 07869 USA 973-361-5700 Fax: 973-361-5722 www.gtmicrowave.com e-mail: gtmicrowav@aol.com

Modulators Attenuators Phase Shifters Switches Custom Sub-Assemblies